

VANGUARD

Concrete Paver

BWS BEST WAY
STONE



Installation Guide

VB
VAN BEEK'S
LANDSCAPE SUPPLY

www.vanbeeks.com

VANGUARD NEW

SIGNATURE SERIES PAVER / 100MM /



BUNDLE OVERVIEW

4" x 12"

8" x 24"

UNITS



7.87" x 23.63" x 3.94"
200mm x 600mm x 100mm
Units per bundle: 48
Units per layer: 8

EDGE SURFACE



3.94" x 11.81" x 3.94"
100mm x 300mm x 100mm
Units per bundle: 216
Units per layer: 36

4" x 12" BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	69.75 ft ²	6.48 m ²
Weight	3196 lbs	1449.6 kg
Layers	6	
Coverage per layer	11.62 ft ²	1.09 m ²
Lineal coverage	69.75 ft / 209.25 ft	47.7 m / 95.4 m
Lineal coverage per layer	11.62 ft / 34.87 ft	5.3 m / 10.6 m

COLOURS

Grey Mix
Colorado Grey
Ultra Black

Edge Surface (SPECIAL ORDER)

Pearl
Ultra Black


8" x 24" BUNDLE SPECIFICATIONS

	IMPERIAL	METRIC
Coverage	62 ft ²	5.76 m ²
Weight	1435 lbs	650.9 kg
Layer	6	
Coverage per layer	10.33 ft ²	1.09 m ²
Lineal coverage	31 ft / 93 ft	47.7 m / 95.4 m
Lineal coverage per layer	5.16 ft / 15.5 ft	5.3 m / 10.6 m

INSTALLATION GUIDES - SLABS & PAVERS

SLAB INSTALLATION TYPICAL CROSS SECTION


- 1 Best Way Stone® precast concrete slab 1 3/4" to 2" (45 to 60mm)
- 2 Sand joint fill
- 3 Bedding Sand 1" (25mm)
- 4 Geotextile 12" (300mm) wide
- 5 Plastic edge
- 6 Extra width equal to foundation thickness
- 7 Lawn
- 8 Nail
- 9 Compacted aggregate base 0 3/4" (0-20mm)
- 10 Geotextile
- 11 Subgrade

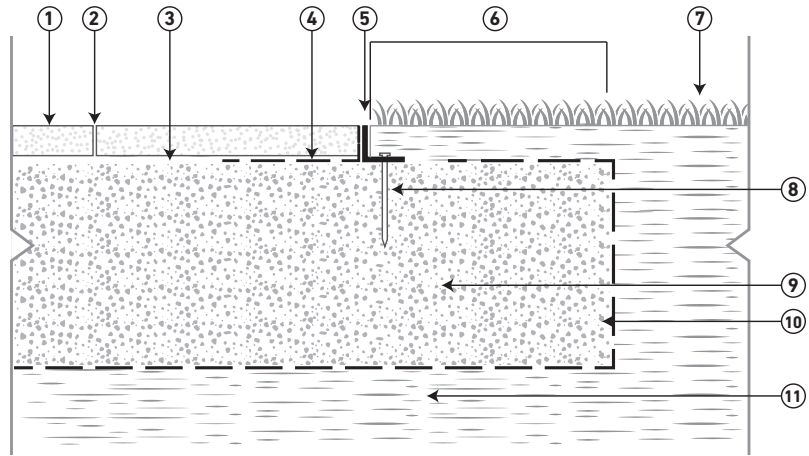

SLABS ON PEDESTAL SET

- 1 Roof deck
- 2 Waterproof membrane
- 3 Protection board
- 4 Rigid insulation
- 5 Adjustable pedestal
- 6 Best Way Stone® precast concrete slab (2-2 1/2") (50-65mm) thickness conforming to ASTM C 1782 and CSA A231.1
- 7 Best Way Stone® precast concrete slab (2-2 1/2") (50-65mm) thickness conforming to ASTM C 1782 and CSA A231.1
- 8 Roof drain

When installing slabs on a pedestal set, ensure to consider load requirements. Refer to project engineer for specific considerations.

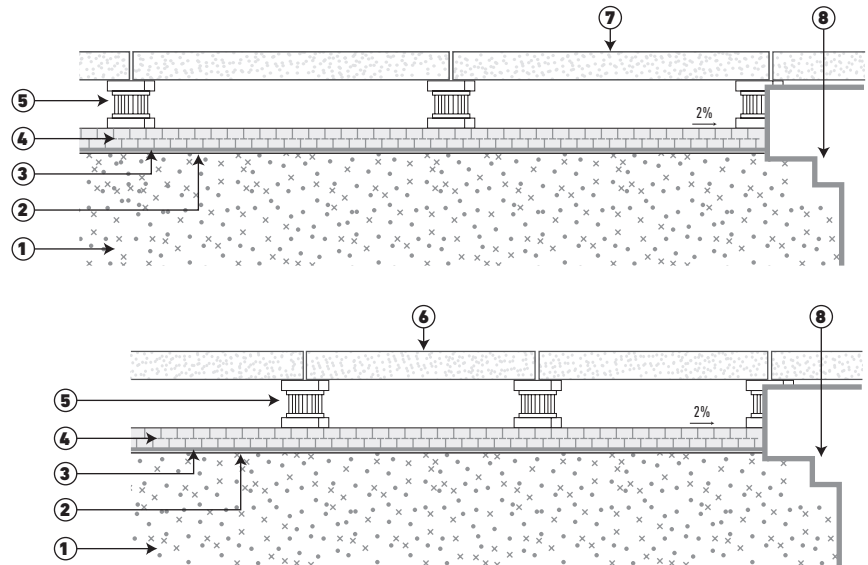

TYPICAL PAVER CROSS SECTION WITH PLASTIC EDGE

- 1 Best Way Stone® precast concrete paver 2 3/8" (60mm) thick min.
- 2 Sand joint fill
- 3 Bedding Sand 1" (25mm)
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge
- 7 Nail
- 8 Geotextile
- 9 Compacted aggregate base 0 3/4" (0-20mm)
- 10 Subgrade

