




PAVER RESTORER

Cleaner

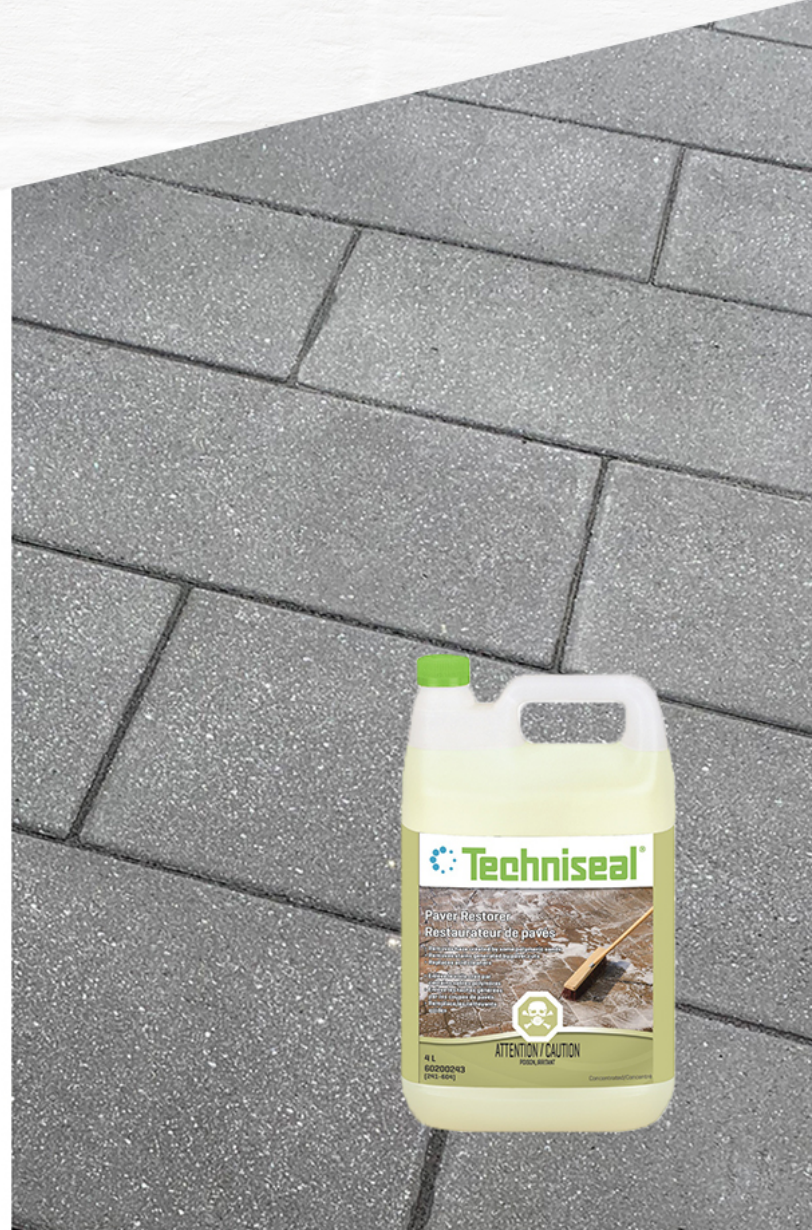

Product Guide



www.vanbeeks.com



PAVER RESTORER

UPDATE

March 19th, 2024

Make sure that you have an up-to-date technical data sheet in hand by consulting our website: techniseal.com
Canada and U.S.A.: dial 1 800 465-7325
Others: dial (514) 523-8324 (Canada)

APPLICATIONS

- Tiles and pavers made of concrete or clay
- Acid-resistant natural stones such as granite, slate and bluestone.

PROPERTIES

- Removes haze created by some polymeric sands.
- Removes stains generated by paver and slab cuts
- Replaces acid cleaner.

DESCRIPTION

Techniseal[®] Paver Restorer removes the haze left after grout and masonry work on tiles and pavers made of concrete or clay. It works efficiently without discolouring or damaging the surface. Unlike muriatic acid, Techniseal[®] Paver Restorer releases very little odour and is environmentally friendly.

DIRECTIONS

BEFORE YOU BEGIN

ALWAYS TEST on a small hidden area of approximately 0.4 m² (4 sq. ft.) to ensure that result meets your expectations (see Warranty). **Do not use** on natural stone that are acid-sensitive (such as calcareous stones), wet-cast pavers and stamped or poured concrete. • Wear rubber gloves and safety goggles. • Do not mix product with any other chemicals • Never use this product without first consulting with local authorities regarding the application of such products, waste management and run-offs. • Do not apply under blazing sun. • **Protect** people, vehicles, property, vegetation, and other surfaces not set for cleaning from product residue, splashes, fumes and wind drifts.

PREPARATION

SURFACE WETTING: To reduce the penetration of Paver Restorer into sand joints and thus make product easier to rinse, first wet the surface to saturate joints with water; then let the surface dry, and apply product.

DILUTION: Dilution must be adjusted according to the amount of haze present on the pavers. In a plastic container, like a watering can, dilute the product in water. Always pour the product in water, not the other way around. The recommended dilution ratio is 1 part product in 4 parts water, depending on the severity of the haze. **Always test** the dilution on a small area first, in order to clean the surface without damaging or discoloring the material. If haze persists, reapply product using the proper dilution. It is advisable to start at a ratio of 1:8 with pavers having a very light color (ex. white or ivory) or very dark (ex. black, charcoal or granite).

Newly installed polymeric sand: Wait at least 30 days before applying the product.

APPLICATION

Application Conditions:

- Surface must be dry, warm to the touch.
- Temperature must be between 10 and 30°C.
- Use a consistent application method over the entire surface.

Important: Do not apply product with a mop or a broom. Never let the cleaning solution dry on the surface; keep it wet at all times until it is completely rinsed off. **Never** apply the product at full strength.

Clean one section of 200 sq. ft. at a time. On each section, starting from the bottom of the slope, cover surface with diluted solution, making sure to cover the whole section without leaving any dry spots. Next, gently scrub the surface using a street broom; **rinse immediately and thoroughly**, until all traces of foam disappear, before proceeding to another section. In cleaning each section, overlap the edges of adjoining sections to ensure that no uncleaned strips are left between them. Once all the sections have been cleaned, rinse thoroughly and let dry. If there is any haze left on the surface, repeat cleaning.

CAUTION

This product may damage the material if applied at full strength; must be diluted with 4 or more parts water. Never use this product without first consulting local authorities regarding the application of such products, waste management and run-offs.

COVERAGE

4 L of product clean up to 19 m² (200 sq. ft.) when diluted at 1:4 (1 part cleaner for 4 parts water). The coverage will depend on dilution.

STORAGE

Store in a cool and dry place, away from the sunlight and with adequate ventilation.

PACKAGING

Product code	Size	Units per box	Units per pallet
60200243	4 L	4	144

WARNING

For more information and advice on the proper handling, storage, and disposal of this product, please refer to the latest version of its Safety Data Sheet (SDS). This official document contains physical, ecological, and other important information pertaining to the safe usage of this product. Visit www.techniseal.com or call 1-800-465-7325 to request or find an up-to-date version of this product's Safety Data Sheet (SDS).

KEEP OUT OF REACH OF CHILDREN

TRANSPORT

For more information and advice on the proper handling and transportation of this product, please refer to the latest version of its Safety Data Sheet (SDS). Visit www.techniseal.com or call 1-800-465-7325 to request or find an up-to-date version of this product's Safety Data Sheet (SDS).

LIMITED WARRANTY

Having no control over the use of the products, Techniseal® does not guarantee finished work. Re-placement of any defective product shall be the buyer's sole remedy under this warranty. A proof of purchase will be required for any claim. Before using this product, user shall determine the suit-ability of the product for it intended use, and user alone assumes all risks and liability whatsoever in connection therewith. User shall test product in a small inconspicuous area (approx. 0,4 m²-4 sq. ft.). This limited warranty excludes any liability for any consequential, incidental, indirect or special damages. Except for the limited warranty described above, manufacturer specifically disclaims and excludes any other express warranty, any implied warranty or merchantability or goods, and im-plied warranty of fitness of goods for any particular purpose.