

COVINGTON

Concrete Paver



Installation Guide




www.vanbeeks.com



Covington

Three great colours, four sizes and a variety of laying patterns make **Covington** pavers one of our most versatile options. Use all four sizes to create an old world cobblestone street pattern, use the square pavers to form a diamond pattern with the rectangular pavers making an elegant border, or try one of the suggested laying patterns. No matter which design you choose Covington pavers are sure to bring charm to your driveway or patio.

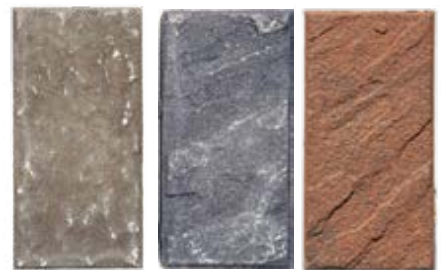

Beige

Slate

Auburn

Old world charm for modern living



Covington Small

15 x 30 x 6 cm

(5.9 x 11.8 x 2.4 in)

Coverage: 0.48 sq. ft.
152 pieces per bundle
13.5 lbs each
2,169 lbs per bundle



Covington Medium

30 x 30 x 6 cm

(11.8 x 11.8 x 2.4 in)

Coverage: 0.96 sq. ft.
114 pieces per bundle
27 lbs each
3,078 lbs per bundle



Covington Large

30 x 45 x 6 cm

(11.8 x 17.7 x 2.4 in)

Coverage: 1.45 sq. ft.
57 pieces per bundle
37 lbs each
2,210 lbs per bundle



Mega Covington

45 x 45 x 6 cm

(17.7 x 17.7 x 2.4 in)

Coverage: 2.25 sq. ft.
38 pieces per bundle
61 lbs each
2,318 lbs per bundle



Make all colour selections from actual samples

Prepare to do it right!

The best driveways and patios start with Triple H Paving stones, but it's important to install your pavers properly. **When laying your paving stones always take the time to create the proper base.**

1. Excavation

When excavating for your project consider these two things:

SOIL TYPE: Clay soil requires that you dig deeper before applying your base material.

HEAVY LOADS: Driveways hold heavy loads and therefore require deeper excavation.

2. Base Layer


Consider load and drainage. Your base material must be strong enough to handle the load of its intended use, it must allow water to drain from the surface. Compact your base in layers and ensure that it extends at least 6 inches beyond the edge of your driveway or patio.

3. Bedding Sand

This layer is also important to allow water to drain from the surface. Smooth it out and ensure that it is deep enough so that you can lay the pavers perfectly! (We don't recommend limestone screening because it doesn't allow for proper drainage.)

4. Joint Material

To keep weeds out and to keep pavers in place choose an appropriate joint material. There are many types of joint material. We have designed the Highborn paver to work well and look great with polymeric sand. If you choose polymeric sand be sure to follow the directions provided on the package closely as some polymeri can stain pavers.

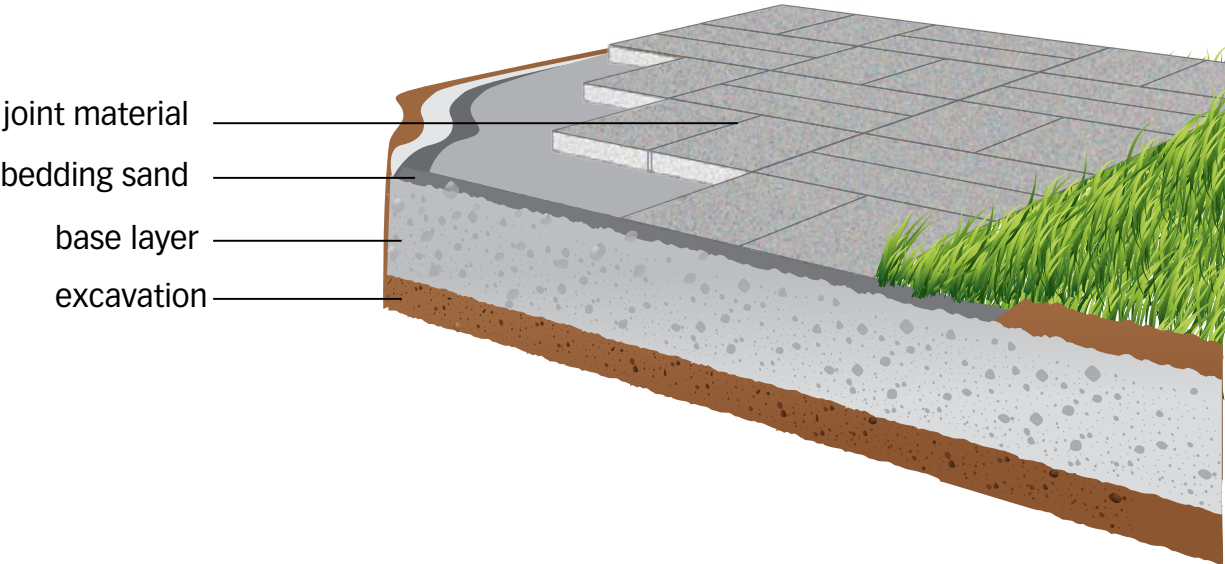

Patio stone area specifications

30 x 15 cm
(approx. 11.8 x 5.9 in)
covers .48 sq ft.

Calculate area:
length x width divided by .48
= number of slabs required.

30 x 45 cm
(approx. 11.8 x 17.7 in)
covers 1.45 sq ft.

Calculate area:
length x width divided by 1.45
= number of slabs required.

60 x 40 cm
(approx. 16 x 24 in)
covers 2.6 sq ft.

Calculate area:
length x width divided by 2.6
= number of slabs required.

60 x 75 cm
(approx. 24 x 29.5 in)
covers 4.85 sq ft.

Calculate area:
length x width divided by 4.85
= number of slabs required.

30 x 30 cm
(approx. 11.8 x 11.8 in)
covers .96 sq ft.

Calculate area:
length x width divided by .96
= number of slabs required.


50 x 50 cm
(approx. 20 x 20 in)
covers 2.7 sq ft.

Calculate area:
length x width divided by 2.7
= number of slabs required.


60 x 60 cm
(approx. 24 x 24 in)
covers 4 sq ft.

Calculate area:
length x width divided by 4
= number of slabs required.


Bristol, Covington, Highthorn

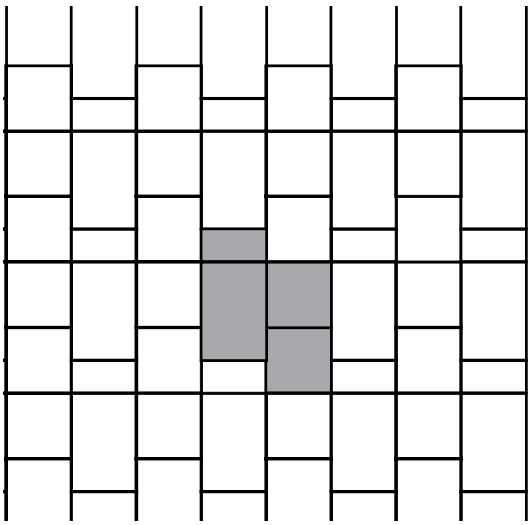


	%	Ratio
large	33	1
medium	50	2
small	17	1

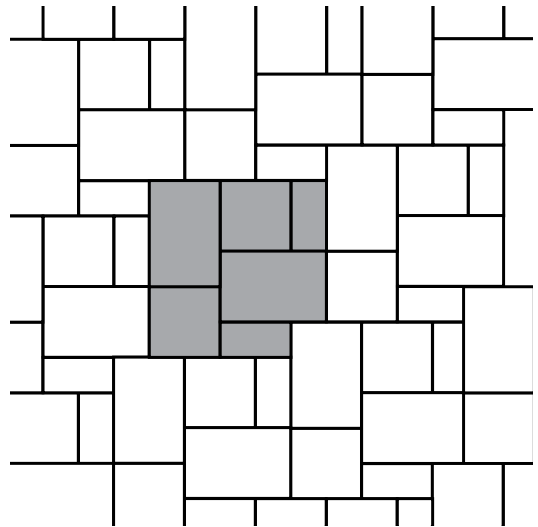

	%	Ratio
large	50	2
medium	33	2
small	17	2

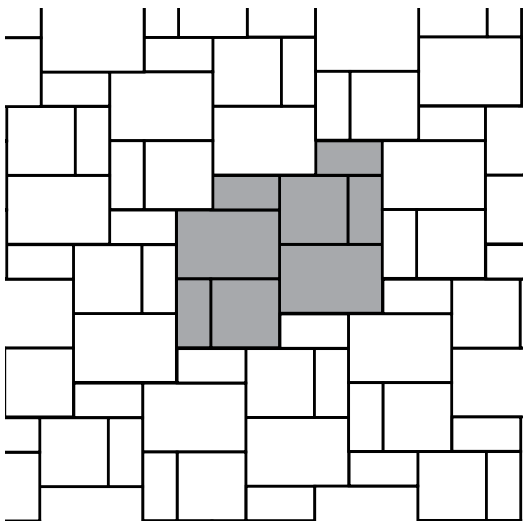

	%	Ratio
large	42.9	2
medium	28.6	2
small	28.5	4

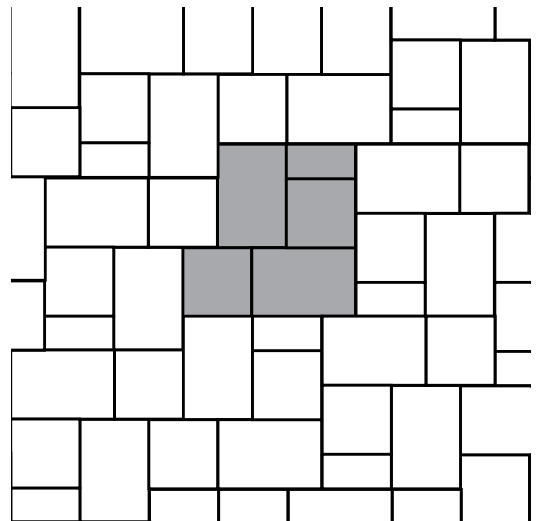

	%	Ratio
large	55	2
medium	36	2
small	9	1