


MATTONI

Concrete Paver

UNILOCK

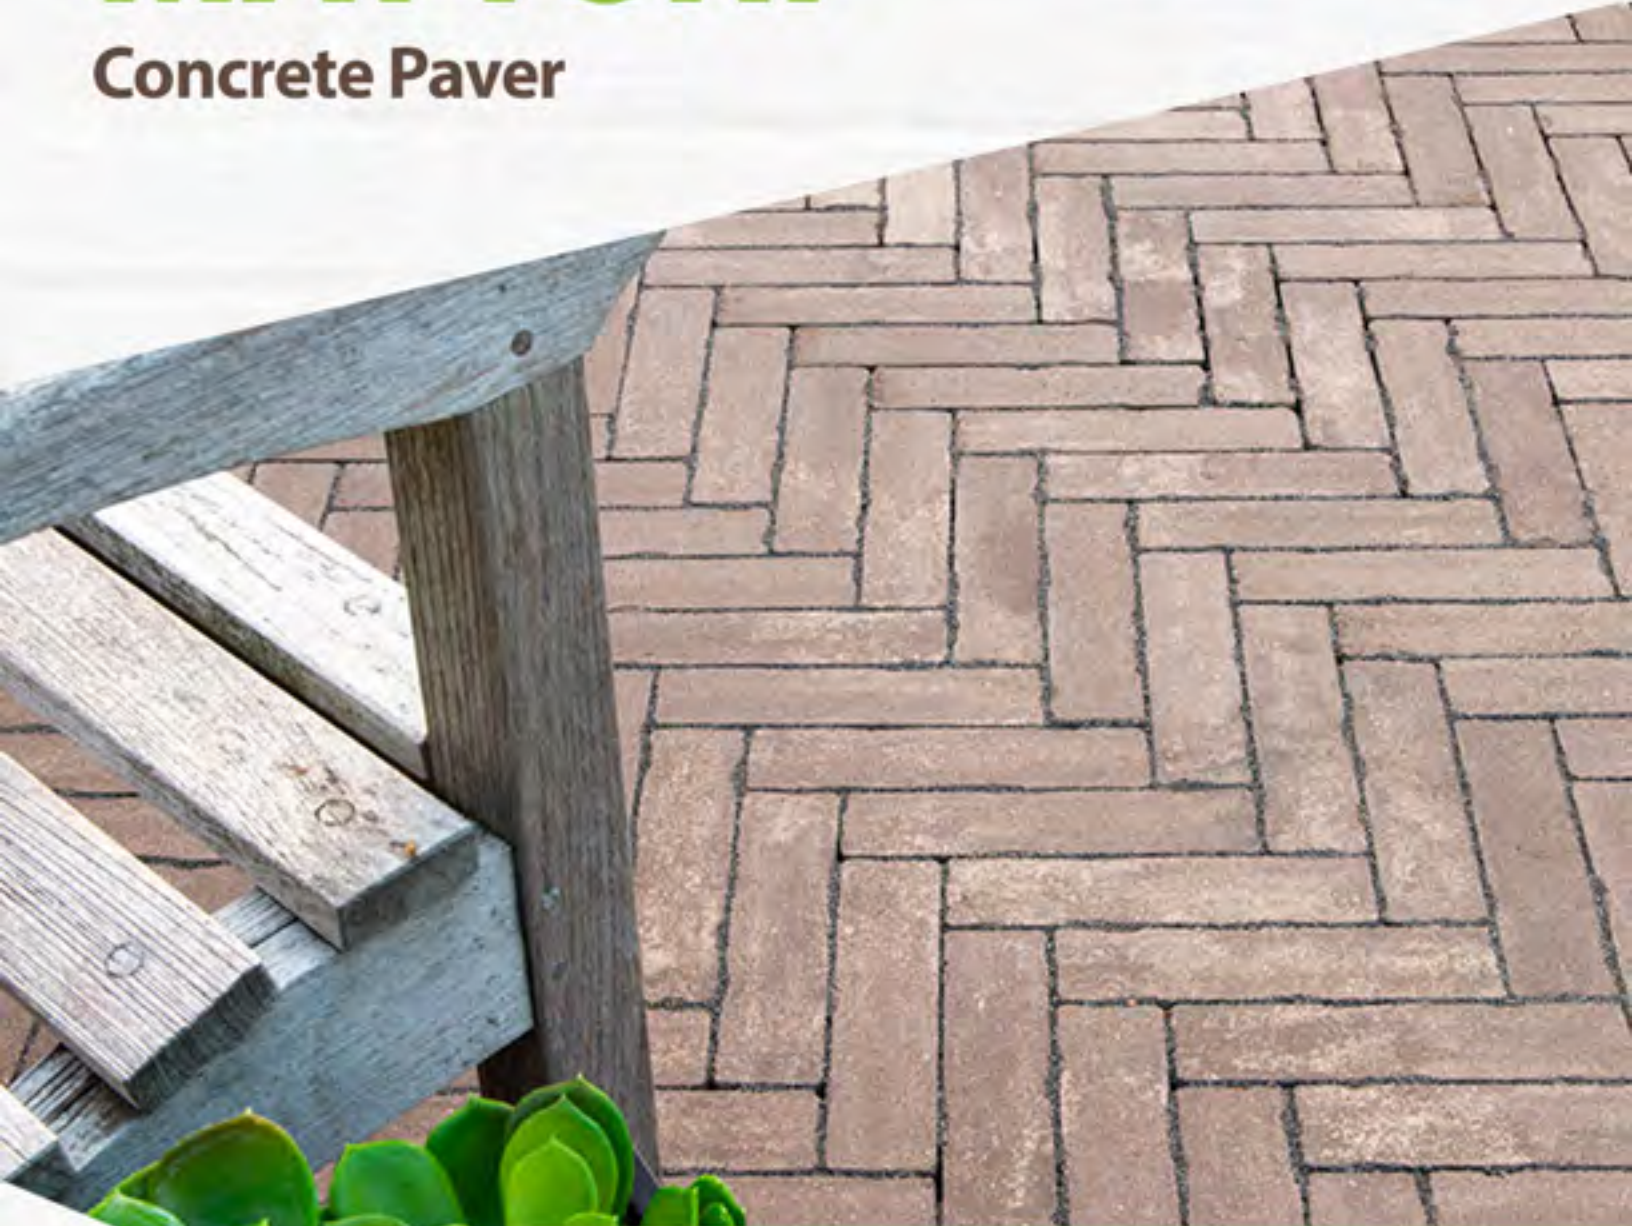

Installation Guide

VB
VAN BEEK'S
LANDSCAPE SUPPLY

www.vanbeeks.com

APPLICATIONS

Note: Not all sizes are suitable for every application. Contact Unilock Representative for assistance.

Borders and Accents



Commercial Vehicular



Roadway, Streetscape, VehicularEntranceway, ParkingLot

Light Duty Vehicular



Residential Driveway, CommercialPedestrian

Residential & Commercial Pedestrian



Patio, Terrace, PoolDeck, Entryway, Courtyard

Residential Driveway



COLORS

SABLE FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

DARK CHARCOAL FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

GRANITE FINISH: ANTIQUED / PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

NOTTE
FINISH: ANTIQUED /
PROCESSED



STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"


SCURO
FINISH: ANTIQUED /
PROCESSED




STANDARD
60mm x 240mm x 70mm
2 3/8" x 9 1/2" x 2 3/4"

JOINT SPACING = 4MM


LAYING PATTERNS



LP MATTONI RB A



LP MATTONI HB C

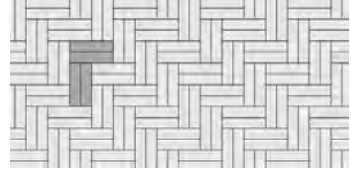


LP MATTONI DHB D

PACKAGING

	STANDARD
UNIT THICKNESS (MM)	70
LAYERS PER BUNDLE	8
SQ FT PER BUNDLE	89.28
SQ FT PER LAYER	11.16
SQ FT PER UNIT	0.16
UNITS PER BUNDLE	576
UNITS PER LAYER	72
LIN FT PER BUNDLE - SOLDIER	113.39
LIN FT PER LAYER - SOLDIER	14.17
LIN FT PER UNIT - SOLDIER	0.20
LIN FT PER BUNDLE - SAILOR	453.54
LIN FT PER LAYER - SAILOR	56.69
LBS PER BUNDLE	2,858.70
LBS PER LAYER	357.34
LBS PER UNIT	4.96

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

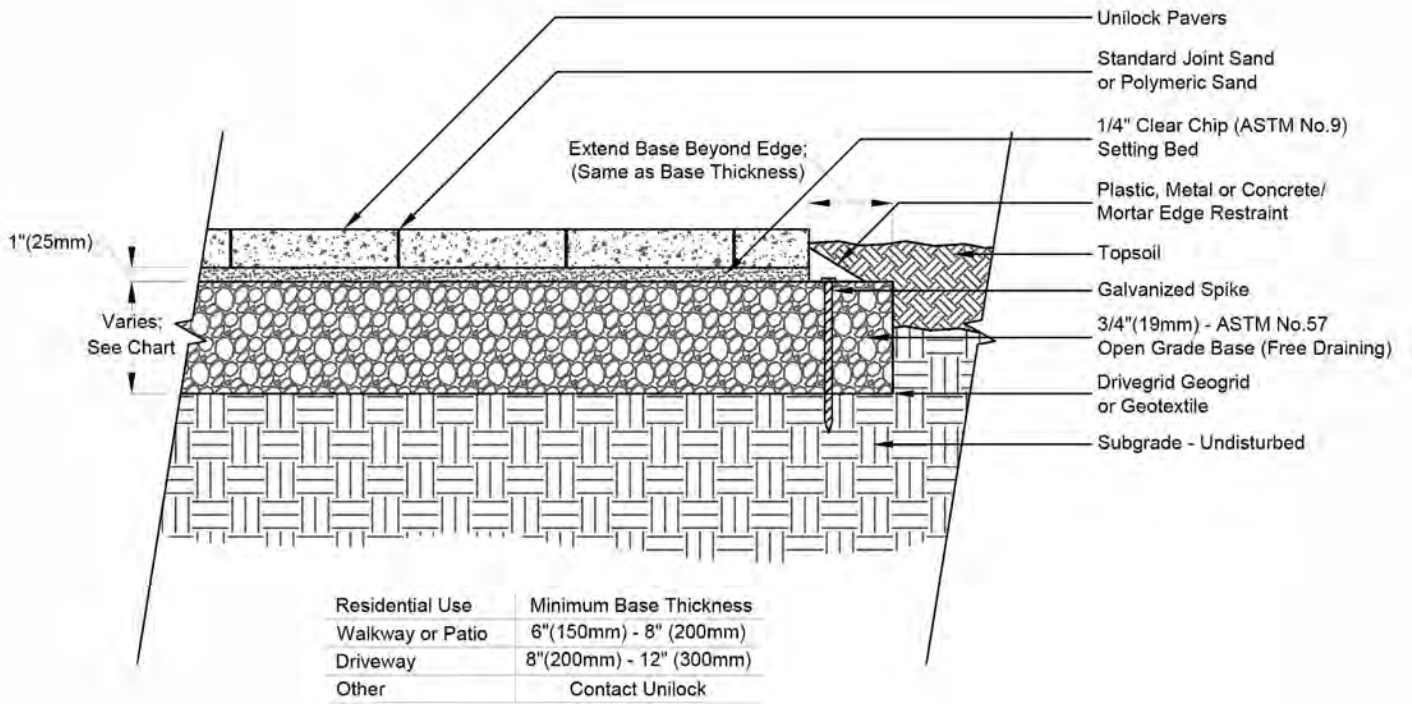

INSTALLATION NOTES

Always test a small area to make sure the results are as expected.

Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

UNILOCK®